




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : A61F 2/44, G09B 23/32	A1	(11) International Publication Number: WO 93/16664 (43) International Publication Date: 2 September 1993 (02.09.93)
(21) International Application Number: PCT/GB93/00386 (22) International Filing Date: 25 February 1993 (25.02.93) (30) Priority data: 9204263.9 28 February 1992 (28.02.92) GB (71) Applicant (for all designated States except US): LIMBS & THINGS LIMITED [GB/GB]; Radnor Business Centre, Radnor Road, Horfield, Bristol BS7 8QS (GB). (72) Inventor; and (75) Inventor/Applicant (for US only) : COOPER, Carolyn, Margot [AU/GB]; 5 College Fields, Clifton, Bristol BS8 3HP (GB). (74) Agent: NEWSTEAD, Michael, John; Page Hargrave, Temple Gate House, Temple Gate, Bristol BS1 6PL (GB).		(81) Designated States: AT, AU, BB, BG, BR, CA, CH, CZ, DE, DK, ES, FI, GB, HU, JP, KP, KR, LK, LU, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SK, UA, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: ARTIFICIAL SPINAL DISC

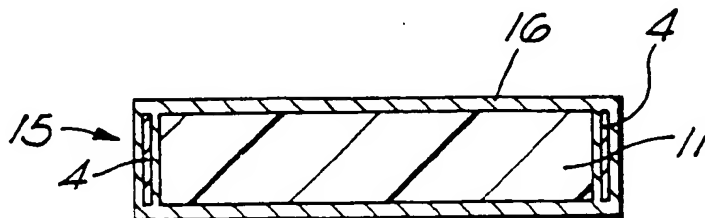

(57) Abstract

An artificial spinal disc comprises a body (15) of a moulded polyurethane elastomer (16) having a circumferential reinforcement in the form of a band (4) of net material and having an internal space filled with pliable material (11).

BEST AVAILABLE COPY

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NL	Netherlands
BE	Belgium	GN	Guinea	NO	Norway
BF	Burkina Faso	GR	Greece	NZ	New Zealand
BG	Bulgaria	HU	Hungary	PL	Poland
BJ	Benin	IE	Ireland	PT	Portugal
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SK	Slovak Republic
CI	Côte d'Ivoire	LJ	Liechtenstein	SN	Senegal
CM	Cameroon	LK	Sri Lanka	SU	Soviet Union
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	MC	Monaco	TG	Togo
DE	Germany	MG	Madagascar	UA	Ukraine
DK	Denmark	ML	Mali	US	United States of America
ES	Spain	MN	Mongolia	VN	Viet Nam
FI	Finland				

ARTIFICIAL SPINAL DISC

The present invention relates to an artificial spinal disc and a method of making an artificial spinal disc.

5 In the medical field, for research and teaching purposes and for use in practising surgical techniques, there is a need for an artificial spinal disc. Such a disc can either be used as such or several can be included in an artificial spine. In the latter case, the key to
10 simulation of the accurate movement of the different sections of the spine is the production of working artificial intervertebral discs which must be securely attached top and bottom to the vertebrae as in life. Thus when the spine is flexed, the discs are extended or retracted.

15 According to the present invention from one aspect, there is provided an artificial spinal disc comprising a body of moulded elastomeric material.

According to the present invention from another aspect, there is provided a method of making an artificial spinal
20 disc, comprising moulding elastomeric material to form a body.

Said elastomeric material preferably comprises a polyurethane elastomer.

25 Preferably, the body includes a circumferential reinforcement, for example a band of reinforcing material such as net material. Preferably, said reinforcement is such that it is less stretchable in the circumferential direction of the body than orthogonal to that direction.

30 Said body could be formed with an internal space, which space could be filled with a pliable material, which pliable material could comprise cured elastomeric material for example.

The body is preferably made using the steps of:-

applying elastomeric material to at least a base of
a cavity having the general shape of a spinal disc;

receiving a plug inside said cavity;

5 applying elastomeric material into a space between
 said plug and a side wall of the cavity;

removing said plug;

at least partially filling said cavity with a
support material; and

10 applying elastomeric material over said support
 material.

In this case, said elastomeric material could be applied
over said support material by covering said cavity with
a mould portion and applying elastomeric material between
15 said mould portion and the cavity and over said support
 material.

Said support material could also provide such pliable
material.

20 The present invention will now be described, by way of
 example, with reference to the accompanying drawings, in
 which:

Figures 1 to 3 illustrate the production of a band of
reinforcing material for use in an artificial spinal
disc, Figure 4 illustrating the stretchability of the
25 band;

Figures 5 to 11 illustrate steps in the production of the
disc; and

Figure 12 is a cross-section through the finished disc.

To produce a simulated, artificial spinal disc according to one example of the present invention, first (referring to Figure 1) a piece 1 of fisherman's net is pinned to a frame 2 so that it is stretched under tension in one direction. The stretched piece 1 is then starched so that the result is that it will stretch substantially no more in the direction in which it was stretched but will do so in the orthogonal direction.

Referring to Figure 2, a template 3 having a shape which corresponds to the circumferential profile of a spinal disc is then laid on to the piece 1 of net, extending longitudinally in the direction in which the piece 1 was stretched. The outline of the template 3 is then drawn on to the piece 1 and then the outline is cut around to produce a reinforcing band 4 for the artificial spinal disc - see Figure 3. Alternatively, a die is made of the patterns of several reinforcing bands and several such bands are stamped out at a time using the die. A band 4 represents the annulus of a spinal disc and it allows the disc wall to stretch superiorally/inferiorally but substantially not to extend its perimeter - see Figure 4 in which the band 4 can stretch in the directions of arrows Y but substantially cannot stretch in the directions of arrows X.

A polyurethane elastomer is then painted (or injected) over the base and side wall of a cavity 5 of a mould 6 (see Figure 5), the cavity 5 generally having the shape of a spinal disc. The reinforcing band 4 is then laid in around the side wall of the cavity 5 - see Figure 6. Then, a lid 7 having a plug 8 is carefully fitted on to the mould 6 (see Figure 7), the plug 8 being somewhat smaller than the cavity 5 with the band 4 in it, to enable a hollow shape to be cast. Referring to Figure 8, with the lid 7 tied to the mould 6, the polyurethane elastomer is injected via a syringe 9 through one of two

holes 10 in the lid 7 until the space between the plug 8 and the band 4 is full. Before application of elastomer as described above, the mould is sprayed with release agent.

- 5 After the polyurethane elastomer has set, the lid 7 is removed and a mixture 11 of a polyurethane elastomer and plasticizer (such as that sold under the trade name "Flabbercast" by B.J.B. Enterprises, Inc., of 13912 Nautilus Drive, Garden Grove, California 92643, USA) is
10 poured into the hollow cavity defined by the set polyurethane elastomer to within about 2mm from the top - see Figure 9. When the mixture 11 has cured, a generally flat lid 12 having a shallow cavity 13 in the general shape of a vertebra is carefully fitted on to the mould
15 6 with the cavity 13 overlying the now filled cavity 5 - see Figure 10. With the lid 12 tied to the mould 6, the polyurethane elastomer is injected via the syringe 9 through one of the holes 14 in the lid 12 until the space above the cured mixture 11 is full (see Figure 11), the
20 cured mixture 11 providing support material for this step.

- After the polyurethane elastomer has set, the lid 12 is removed and the body 15 in the cavity 5 is removed. Figure 12 is a section through an artificial spinal disc
25 manufactured according to the foregoing, reference numeral 16 denoting the polyurethane elastomer. The set mixture 11 now serves as pliable material inside the artificial disc.

- The body 15 is now usable as an artificial spinal disc, for example in an artificial spine (see below), for the purposes of demonstrating the structure of a spinal disc itself, and to simulate the properties of such a disc as found in life. For demonstrating disc structures in different age groups, for example, such bodies 15 may be
30 filled with different mixtures 11, of different cured hardnesses.
35

A simulated, artificial spinal disc in the form of a body 15 may also be used to demonstrate a prolapsed and herniated disc by making it so that a certain amount of the cured mixture 11 can escape through the disc's side wall in the form of a bladder when under pressure. When pressure is released, the mixture 11 is retracted back into the disc to re-establish normal anatomy.

10 Rings of elastomer could be added to the body 15 to simulate a degenerated disc as found in injury or the aged.

There will now be described how an artificial spine can be made using discs made as described above.

First, to make a mould, components as follows are taken and assembled so as to be anatomically correct:

15 24 vertebrae; 1 sacrum and coccyx; and the base of the skull, all moulded in silicone rubber and cast in polyurethane. (The bones).

20 1 section the length of the spine, of extruded plastics material 17 millimetres in diameter, which represents the spinal cord.

23 intervertebral discs running from C1 to S1.

25 A modelling wax is then laid over the components, to represent connecting ligaments and spinal nerves. The assembly is then moulded in silicone rubber and surrounded with an epoxy resin case to produce a silicone rubber mould.

30 To manufacture the artificial spine, a fresh set of bones is taken together with hollow artificial discs made as described above. Both the articulating surfaces of the artificial discs and the bodies of the vertebrae are painted with primer and allowed to dry. The discs are

inserted between the vertebrae and elastomer is painted
between the primed surfaces and allowed to dry. The
whole spine with such an extruded plastics "spinal cord"
in place is put into the mould. The mould is closed and
5 elastomer is injected. The result is an articulated
spine with simulated ligaments and nerves made of
flexible elastomer, the resulting model having the
dynamics of a human spine and the degree of movement
being dependent on the flexibility of the particular
10 contents 11 of the discs. Such an artificial spine can
be used to demonstrate both the properties of a human
spine and those of discs themselves of such a spine.

CLAIMS

1. An artificial spinal disc comprising a body of moulded elastomeric material.
2. A disc according to claim 1, wherein said elastomeric material comprises a polyurethane elastomer.
3. A disc according to claim 1 or 2, wherein the body includes a circumferential reinforcement.
4. A disc according to claim 3, wherein said reinforcement comprises a band of reinforcing material.
5. A disc according to claim 4, wherein said band comprises a band of net material.
6. A disc according to claim 3, 4 or 5, wherein said reinforcement is less stretchable in the circumferential direction than orthogonal to that direction.
7. A disc according to any preceding claim, wherein said body is formed with an internal space.
8. A disc according to claim 7, wherein said internal space is filled with a pliable material.
9. A disc according to claim 8, wherein said pliable material comprises cured elastomeric material.
10. A disc according to any preceding claim, in an artificial spine.
11. Use of a body comprising moulded elastomeric material for the purpose of simulating the behaviour of a spinal disc.
12. A method of making an artificial spinal disc, comprising moulding elastomeric material to form a body.

13. A method according to claim 12, wherein said elastomeric material comprises a polyurethane elastomer.
14. A method according to claim 12 or 13, comprising the step of including a circumferential reinforcement in the forming of said body.
15. A method according to claim 14, wherein said reinforcement comprises a band of reinforcing material.
16. A method according to claim 15, wherein said reinforcing material comprises a band of net material.
17. A method according to claim 14, 15 or 16, including the step of treating said reinforcement so that it is less stretchable in the circumferential direction of the body than orthogonal to that direction.
18. A method according to any of claims 12 to 17, wherein said body is formed so as to have an internal space.
19. A method according to claim 18, wherein said internal space is filled with a pliable material.
20. A method according to claim 19, wherein said pliable material comprises cured elastomeric material.
21. A method according to any of claims 12 to 20, comprising the steps of:-
- applying elastomeric material to at least a base of a cavity having the general shape of a spinal disc;
 - receiving a plug inside said cavity;
 - applying elastomeric material into a space between said plug and a side wall of the cavity;

removing said plug;







at least partially filling said cavity with a support material; and

5 applying elastomeric material over said support material.

22. A method according to claim 21, as dependent on claim 17 or 18, wherein said support material provides said pliable material.

10 23. A method according to claim 21 or 22, wherein said elastomeric material is applied over said support material by covering said cavity with a mould portion and applying said elastomeric material between said mould portion and the cavity and over said support material.

15 24. A method according to any of claims 21 to 23, as dependent on any of claims 14 to 17, wherein said reinforcement is applied around a side wall of said cavity after applying said elastomeric material to at least the base of the cavity and before receiving said plug inside said cavity.

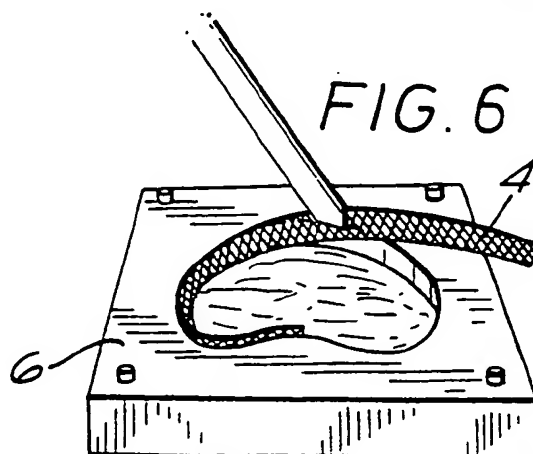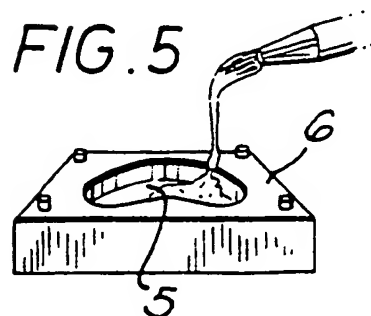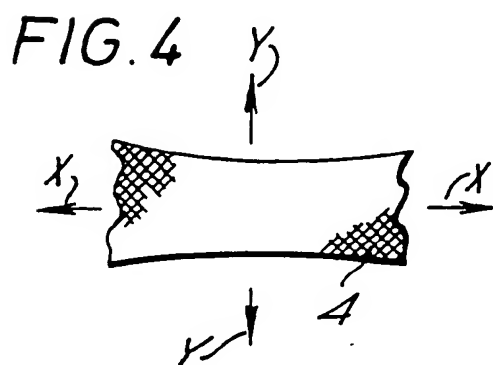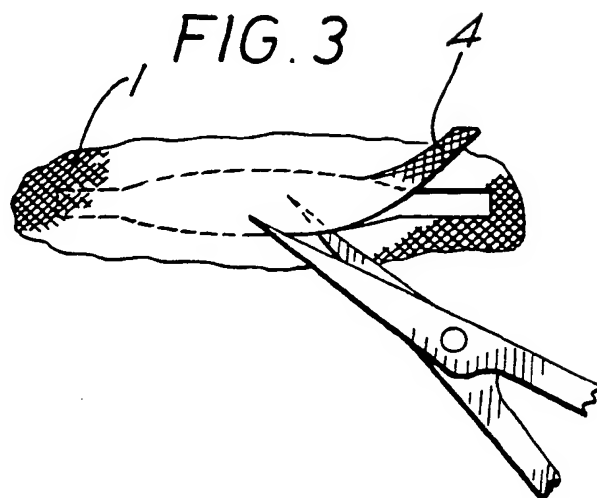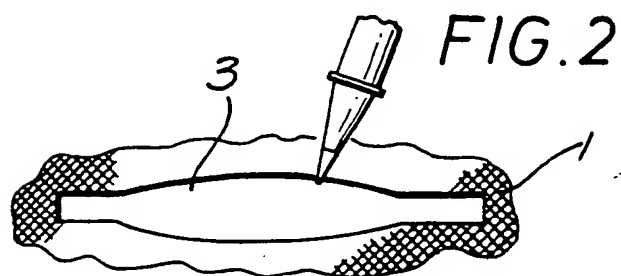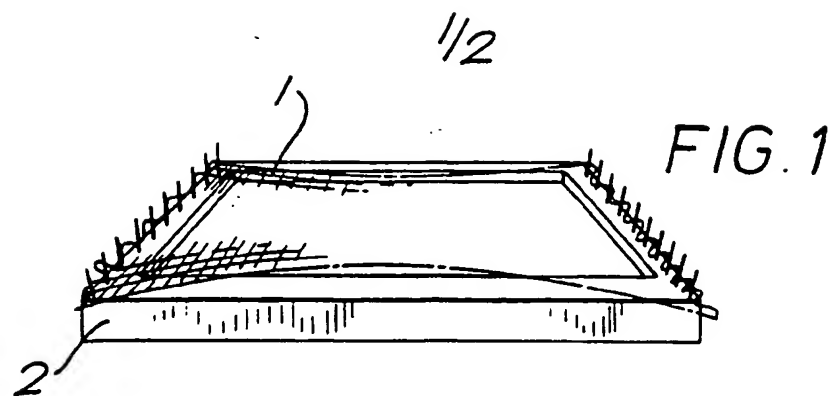

2/2

FIG. 7

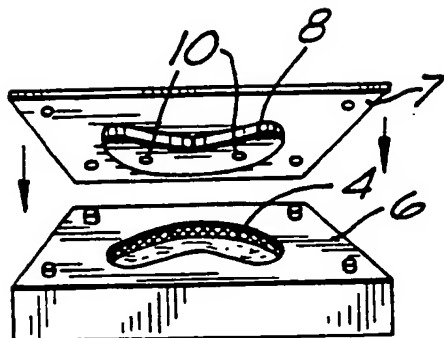


FIG. 8

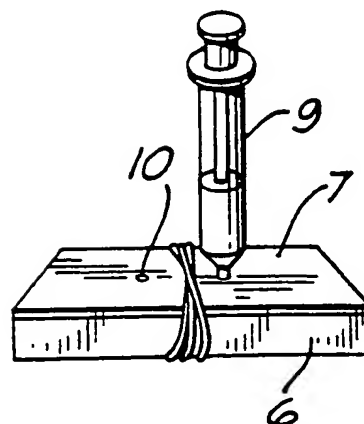


FIG. 9

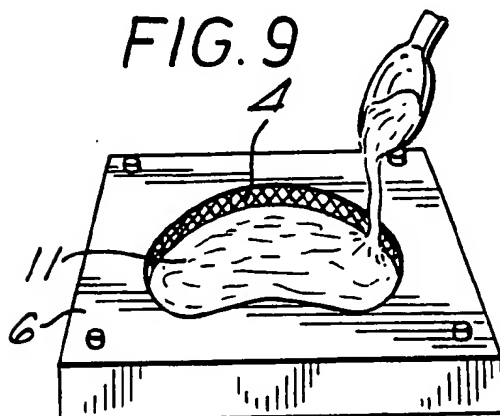


FIG. 10

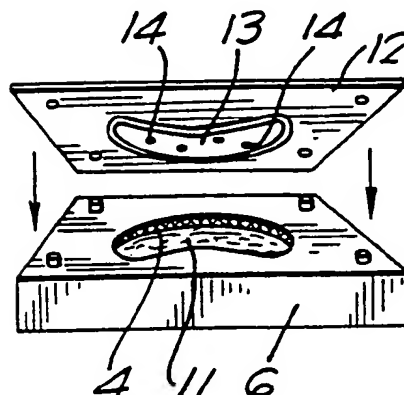


FIG. 11


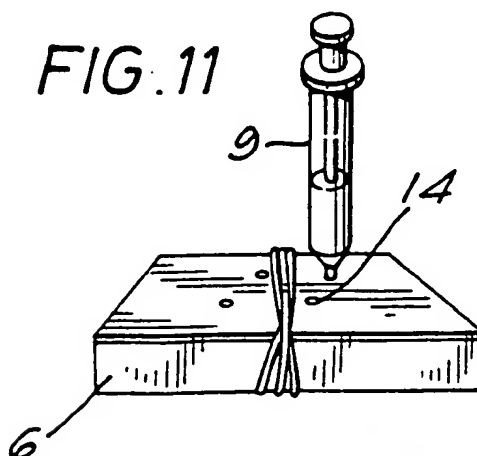


FIG. 12

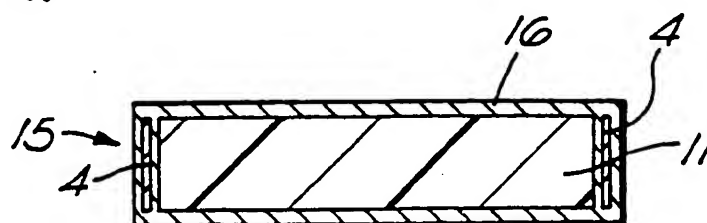

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 93/00386

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶		
According to International Patent Classification (IPC) or to both National Classification and IPC		
Int.Cl. 5 A61F2/44; G09B23/32		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
Int.Cl. 5	A61F ; G09B	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁸		
III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹		
Category ¹⁰	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
X	EP,A,0 346 129 (JOHNSON & JOHNSON) 13 December 1989	1-5,7-12
Y	see the whole document ---	6
Y	EP,A,0 277 282 (SULZER) 10 August 1988 see column 3, line 41 - line 49; figures 1,2 ---	6
X	US,A,3 762 070 (CULVER) 2 October 1973 see abstract; figures ---	11
A	US,A,3 867 728 (STUBSTAD) 25 February 1975 ---	-
A	EP,A,0 356 112 (JOHNSON & JOHNSON) 28 February 1990 -----	-
<p>¹⁰ Special categories of cited documents : ¹⁰</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p>		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search		Date of Mailing of this International Search Report
04 MAY 1993		13. 05.93
International Searching Authority EUROPEAN PATENT OFFICE		Signature of Authorized Officer STEENBAKKER J.

Form PCT/ISA/210 (second sheet) (January 1985)

ANNEX TO THE INTERNATIONAL SEARCH REPORT ON INTERNATIONAL PATENT APPLICATION NO.

GB 9300386
SA 70546

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information. 04/05/93

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0346129	13-12-89	US-A- 4911718	27-03-90
		AU-B- 624143	04-06-92
		AU-A- 3609989	14-12-89
		JP-A- 2224659	06-09-90
EP-A-0277282	10-08-88	CH-A- 671691	29-09-89
		DE-A- 3772033	12-09-91
		US-A- 4932969	12-06-90
US-A-3762070	02-10-73	None	
US-A-3867728	25-02-75	CA-A- 992255	06-07-76
		DE-A,B,C 2203242	10-08-72
		FR-A- 2124815	22-09-72
		GB-A- 1306660	14-02-73
		SE-B- 391122	07-02-77
EP-A-0356112	28-02-90	AU-B- 624627	18-06-92
		AU-A- 3947989	22-02-90
		JP-A- 2224660	06-09-90
		US-A- 5171281	15-12-92

EPO FORM P0479

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE LEFT BLANK